


Capri

8056.01 - 8056.12

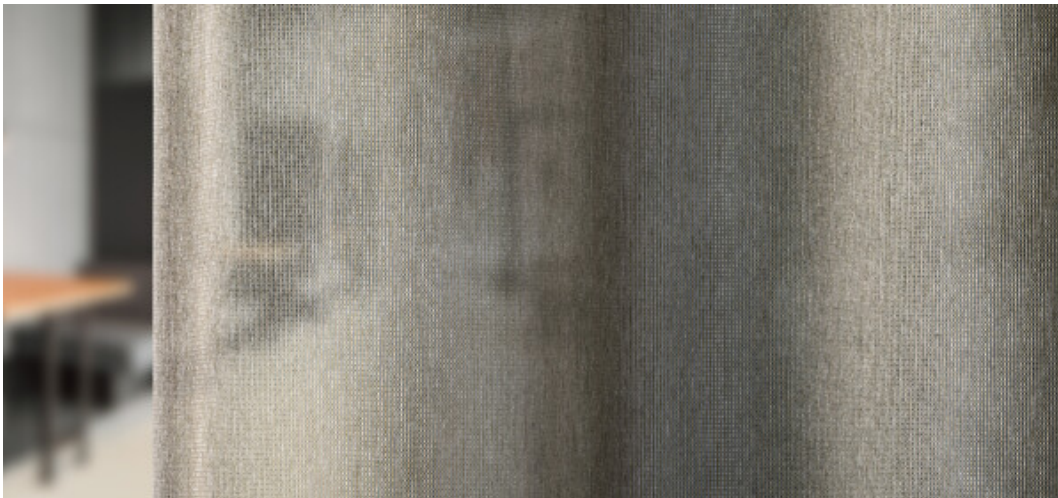

Product
curtain

Omschrijving
Effen, uni semi-transparante akoestische gordijnstof

Samenstelling
100% brandvertragend polyester

Breedte
± 306 cm, ± 120 inches

Gewicht
± 303 gr/m¹, ± 10 oz/yd¹

Geluidsabsorptie
ASTM C423, nrc
0.70
ISO 354, alpha w
0.65 (pleated)


Visueel & Thermisch comfort
EN 410/EN 14501
Test available

Brandwerendheid
BS 5867-2 , Type C
CAN/ULC S109 , Pass
DIN 4102 , B1
EN 13773 , Class 1
NF P 92/503-507 , M1
NFPA 701 (meth. 1 or 2) , Pass
Übereinstimmung , Pass
UNI VF 8456-8457 , Classe 1

Wrijfechtheid
AATCC 8 (solids)
5 (scale 1-5) wet / 5 (scale 1-5) dry
ISO 105-X12
4-5 (scale 1-5) wet / 4-5 (scale 1-5) dry

Lichtechtheid
AATCC 16.2 option 1 or 16.3 opt 3
4-5 (scale 1-5)
ISO 105-B02
6 (scale 1-8)

Keurmerken



Reiniging & Onderhoud



Krimp
Shrinkage 30°
0% warp / -0.6% weft
Shrinkage 70°
-0.6% warp / -1.2% weft

Capri

8056.01 - 8056.12

8056.01 8056.02 8056.03 8056.04 8056.05 8056.06 8056.07 8056.08 8056.09

8056.10 8056.11 8056.12