


Delos

8082.01 - 8082.24

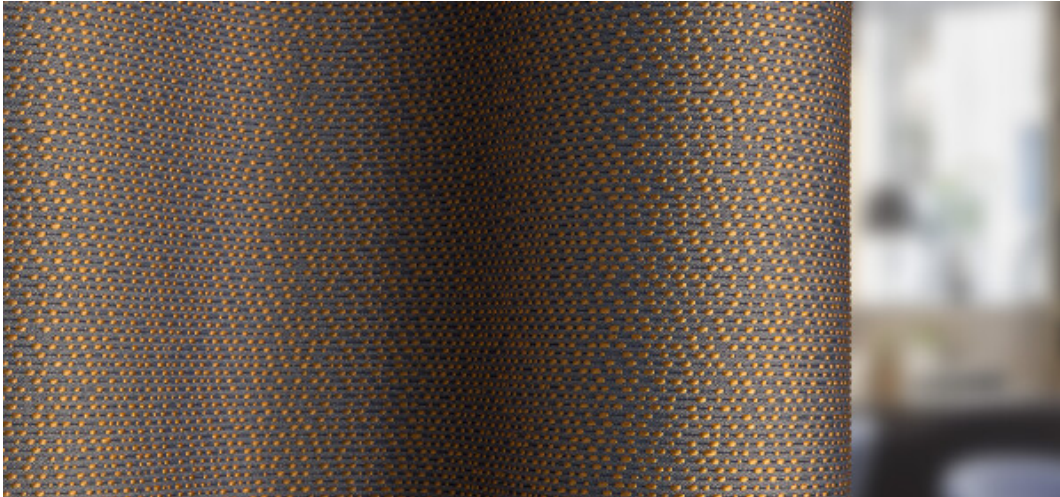

Product

Curtain

Description

Allover 3D structured weave with a two-tonal coloured, sheen yarn effect

Composition

32% recycled polyester FR / 68% polyester FR

Width

± 136 cm, ± 54 inches

Weight

± 354 gr/m¹, ± 11 oz/yd¹

Flame retardancy

**BS 5867-2 , Type C
CAN/ULC S109 , Pass
DIN 4102 , B1**

EN 13773 , Class 1

IMO 2010 FTP part 7 , Pass

NF P 92/503-507 , M1

NFPA 701 (meth. 1 or 2) , Pass

Übereinstimmung , Pass

UNI VF 8456-8457 , Classe 1

Colorfastness to crocking

AATCC 8 (solids)

5 (scale 1-5) wet / 5 (scale 1-5) dry

ISO 105-X12

4-5 (scale 1-5) wet / 4-5 (scale 1-5) dry

Colorfastness to light

AATCC 16.2 option 1 or 16.3 opt 3

4.5 (scale 1-5)

ISO 105-B02

6 (scale 1-8)

Seam slippage

ASTM D434

46 lbs warp / 65 lbs weft

ISO 13936-2

3.6 mm warp / 3.6 mm weft


Labels



USCG -
EU MRA
0038



STANDARD
100
507-0023
Hohenstein HTI



Baustoffklasse schwerentflammbar
DIN 4102, B1

Care & Maintenance



Shrinkage

Shrinkage 70°

-2.1% warp / -1.5% weft

Delos

8082.01 - 8082.24

8082.01	8082.02	8082.03	8082.04	8082.05	8082.06	8082.07	8082.08	8082.09
8082.10	8082.11	8082.12	8082.13	8082.14	8082.15	8082.16	8082.17	8082.18
8082.19	8082.20	8082.21	8082.22	8082.23	8082.24			