


Dikson

7063.01 - 7063.14

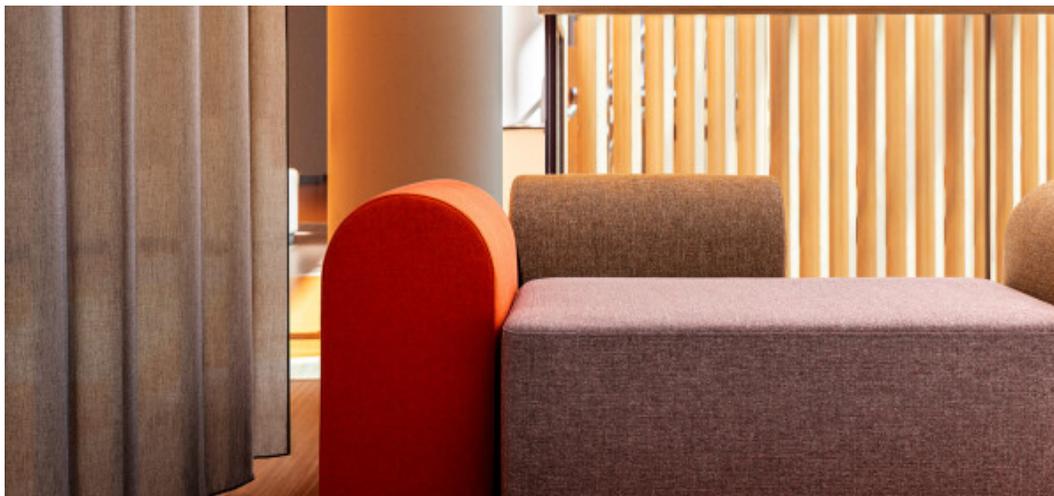

Produkt

upholstery

Beschreibung

Üppiger Melange-Möbelstoff aus weichem Chenille-Garn

Zusammensetzung

> 40% recycled polyester FR / < 60% polyester FR

Breite

± 140 cm, ± 55 inches

Gewicht

± 819 gr/m², ± 26 oz/yd²

Brandschutzklasse

**BS 5852 , Crib 5
Cal TB 117-2013, section 1 , Pass
DIN 4102 , B1
EN 1021/1-2 , Pass
IMO 2010 FTP part 8 , Pass
NF P 92/503-507 , M1
NFPA 260 , Class 1**

Reibecktheit

**ASTM D3597/D4157 (#10 cotton duck) ,
100.000 double rubs Wyzenbeek
ISO 12947-2 , 100.000 rubs Martindale**

Pilling

ASTM D3511

5 (scale 1-5)

ISO 12945-2

4-5 (scale 1-5)

Farbechtheit

AATCC 8

4 (scale 1-5) wet / 4 (scale 1-5) dry

ISO 105 X12

4-5 (scale 1-5) wet / 4-5 (scale 1-5) dry

Lichtechtheit

AATCC 16.2 opt.1 or 16.3 opt. 3

4.5 (scale 1-5)

ISO 105 B02

6 (scale 1-8)

Schiebewiderstand

ASTM D4034

89 lbs warp / 96 lbs weft

ISO 13936-2

2 mm warp / 2 mm weft

Reißfestigkeit

ASTM D5034

474 lbs warp / 262 lbs weft

ISO 13934-1

2500 N warp / 1550 N weft

Labels



USCG -
EU MRA
0038



STANDARD
100
507-0023
Hohenstein HTTI

Pflege & Instandhaltung



Schrumpfung

Shrinkage 30°

-2.6% warp / -1.9% weft

Dikson

7063.01 - 7063.14

7063.01 7063.02 7063.03 7063.04 7063.05 7063.06 7063.07 7063.08 7063.09

7063.10 7063.11 7063.12 7063.13 7063.14