


Dikson

7063.01 - 7063.14

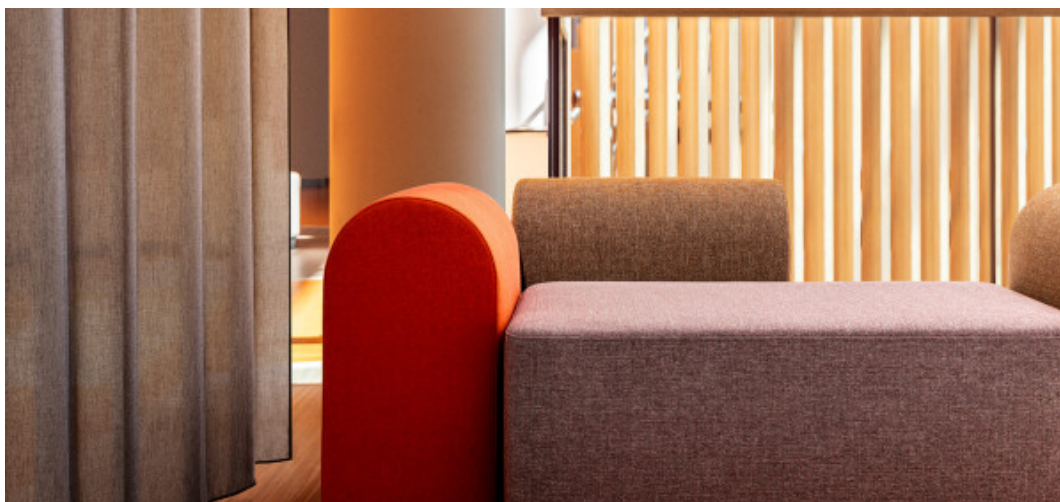

Producto
upholstery

Descripción
**Tapicería de mezcla sofisticada de hilos
suaves de chenilla**

Composición
**> 40% recycled polyester FR / < 60%
polyester FR**

Anchura
± 140 cm, ± 55 inches

Peso
± 819 gr/m¹, ± 26 oz/yd¹

Combustión retardada
**BS 5852 , Crib 5
Cal TB 117-2013, section 1 , Pass
DIN 4102 , B1
EN 1021/1-2 , Pass
IMO 2010 FTP part 8 , Pass
NF P 92/503-507 , M1
NFPA 260 , Class 1**

Resistencia al desgaste
**ASTM D3597/D4157 (#10 cotton duck) ,
100.000 double rubs Wyzenbeek
ISO 12947-2 , 100.000 rubs Martindale**

Pilling
**ASTM D3511
5 (scale 1-5)
ISO 12945-2
4-5 (scale 1-5)**

Resistencia al frotamiento
**AATCC 8
4 (scale 1-5) wet / 4 (scale 1-5) dry
ISO 105 X12
4-5 (scale 1-5) wet / 4-5 (scale 1-5) dry**

Insensibilidad a la luz
**AATCC 16.2 opt.1 or 16.3 opt. 3
4.5 (scale 1-5)
ISO 105 B02
6 (scale 1-8)**

Resistencia al deslizamiento de costuras
**ASTM D4034
89 lbs warp / 96 lbs weft
ISO 13936-2
2 mm warp / 2 mm weft**

Resistencia a la tensión
**ASTM D5034
474 lbs warp / 262 lbs weft
ISO 13934-1
2500 N warp / 1550 N weft**

Etiquetas



USCG -
EU MRA
0038



STANDARD
100
S07-0023
Hohenstein RTTI

Cuidado & Mantenimiento



Contracción
**Shrinkage 30°
-2.6% warp / -1.9% weft**

Dikson

7063.01 - 7063.14

7063.01 7063.02 7063.03 7063.04 7063.05 7063.06 7063.07 7063.08 7063.09
7063.10 7063.11 7063.12 7063.13 7063.14