


Moroni

8060.01 - 8060.29

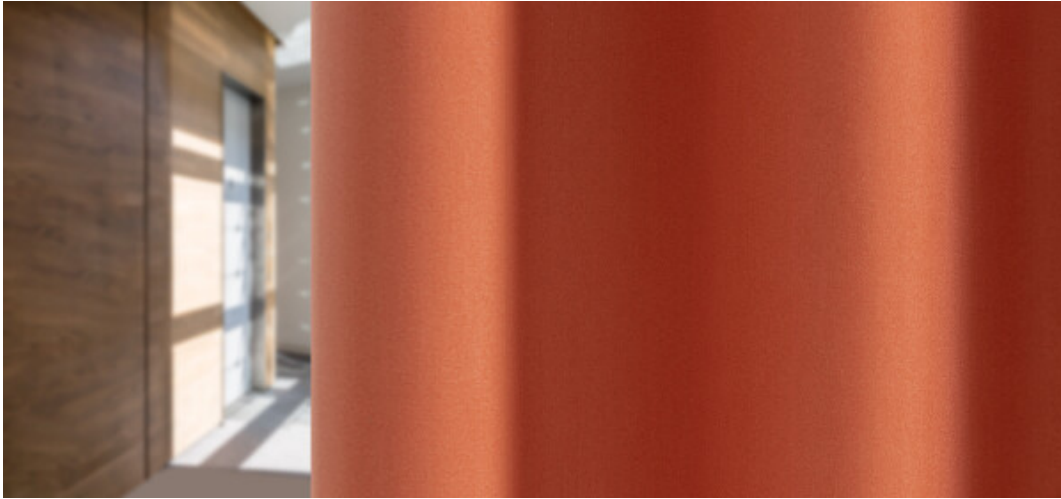

Produit
curtain

Description
Rideau uni finement tissé, black-out

Composition
100% polyester acrylic coating

Largeur
± 280 cm, ± 110 inches

Poids
± 700 gr/m¹, ± 23 oz/yd¹

Confort Visuel & Thermique
AATCC 148
Test available
EN 410/EN 14501
Test available


Non feu
BS 5867-2 , Type B
CAN/ULC S109 , Pass
DIN 4102 , B1
EN 13773 , Class 1
IMO 2010 FTP part 7 , Pass
NF P 92/503-507 , M1
NFPA 701 (meth. 1 or 2) , Pass
Übereinstimmung , Pass
UNI VF 8456-8457 , Classe 1

Résistance au frottement
AATCC 8 (solids)
4.5 (scale 1-5) wet / 4.5 (scale 1-5) dry
ISO 105-X12
4 (scale 1-5) wet / 4 (scale 1-5) dry

Solidité lumière
AATCC 16.2 option 1 or 16.3 opt 3
3.5 (scale 1-5)
ISO 105-B02
5-6 (scale 1-8)

Résistance au glissement à la couture
ASTM D434
66 lbs warp / 47 lbs weft

Étiquettes



Entretien & Maintenance



Rétrécissement
Shrinkage 30°
-1.6% warp / -0.6% weft

Moroni

8060.01 - 8060.29

8060.01	8060.02	8060.03	8060.04	8060.05	8060.06	8060.07	8060.08	8060.09
8060.10	8060.11	8060.12	8060.13	8060.14	8060.15	8060.16	8060.17	8060.18
8060.19	8060.20	8060.21	8060.22	8060.23	8060.24	8060.25	8060.26	8060.27
8060.28	8060.29							