


Naltar

8083.01 - 8083.16

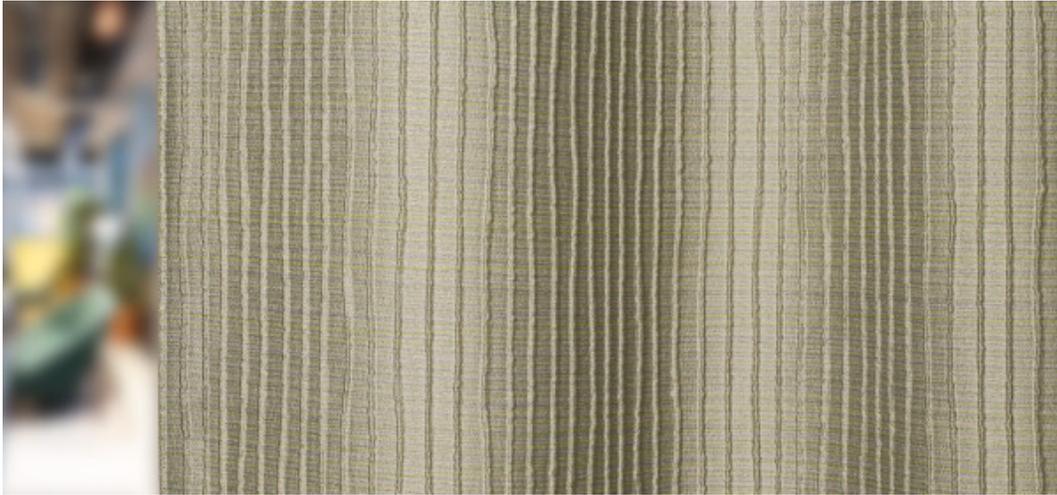

产品
curtain

描述
色调渐变且纵向有机三维肋状结构的双层编织

成分
100% 阻燃聚酯纤维

宽幅
± 144 cm, ± 57 inches

重量
± 273 gr/m², ± 9 oz/yd¹

吸声降噪
ISO 354, alpha w
0.50 (pleated)

视觉及热舒适控制
EN 410/EN 14501
Test available

阻燃
BS 5867-2, Type C
CAN/ULC S109, Pass
DIN 4102, B1
EN 13773, Class 1
IMO 2010 FTP part 7, Pass
NF P 92/503-507, M1
NFPA 701 (meth. 1 or 2), Pass
Übereinstimmung, Pass
UNI VF 8456-8457, Classe 1

耐摩擦褪色
AATCC 8 (solids)
5 (scale 1-5) wet / 5 (scale 1-5) dry
ISO 105-X12
4-5 (scale 1-5) wet / 4-5 (scale 1-5) dry

耐光照褪色
AATCC 16.2 option 1 or 16.3 opt 3
5 (scale 1-5)
ISO 105-B02
6 (scale 1-8)

耐滑缝
ASTM D434
29 lbs warp / 29 lbs weft
ISO 13936-2
2.5 mm warp / 2.7 mm weft

标签



USCG -
EU MRA
0038



STANDARD
100
S07-0023
Hohenstein HTTI



Baustoffklasse schwerentflammbar
DIN 4102, B1

保养与维护



收缩率
Shrinkage 70°
-1.4% warp / +1.5% weft

Naltar

8083.01 - 8083.16

8083.01 8083.02 8083.03 8083.04 8083.05 8083.06 8083.07 8083.08 8083.09

8083.10 8083.11 8083.12 8083.13 8083.14 8083.15 8083.16